


Single Compression Cable Gland

Size : 16mm to 115mm and 3/8" to 4"
Standard : BS 6121:Part-1:2005, EN 50262: 1999
Function : Providing seal on outer sheaths of unarmored cable in indoor and outdoor area.
Ingress Protection : IP65

Material : Brass BS 2874
Thread : Metric and BSC (ET)
Operating Temp. : -20°C to +80°C
Features : Outer Compression seal
Accessories : Shroud, Earth Tag, Lock Nut and Serrated Washer.

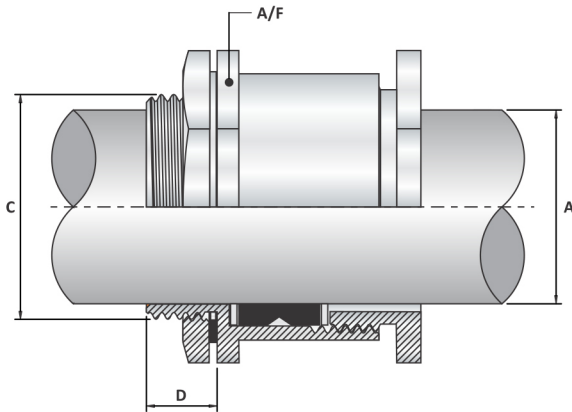

Gland Selection Chart

Size	Thread Size "C"		Thread Length "D"	Cable Range Dia. "A"		Across Flat	CAT NO.
	Metric	ET		Min.	Max.		
3/8"	10	3/8"	7.50	10.00	12.00	18.00	CSCG-10
1/2"	12	1/2"	8.50	10.00	15.00	22.00	CSCG-12
5/8"	16	5/8"	8.00	10.00	16.00	21.00	CSCG-16
3/4"	19	3/4"	8.50	14.00	16.00	23.00	CSCG-19
7/8"	22	7/8"	8.50	16.50	17.50	25.00	CSCG-22
1"	25	1"	9.00	18.50	20.50	29.00	CSCG-25
1 1/8"	28	1 1/8"	10.00	22.50	27.50	35.00	CSCG-28
1 1/4"	32	1 1/4"	10.50	26.50	27.50	40.00	CSCG-32
1 3/8"	35	1 3/8"	10.50	29.50	33.00	44.00	CSCG-35
1 1/2"	38	1 1/2"	11.00	33.50	37.00	47.00	CSCG-38
1 3/4"	45	1 3/4"	11.00	37.50	40.00	54.00	CSCG-45
2"	50	2"	12.00	43.50	43.00	60.00	CSCG-50
2 1/4"	57	2 1/4"	13.00	49.00	52.00	68.00	CSCG-57
2 1/2"	63	2 1/2"	13.00	56.00	64.50	72.00	CSCG-63
2 3/4"	70	2 3/4"	14.00	61.50	67.50	80.00	CSCG-70
3"	75	3"	15.00	66.50	73.00	87.00	CSCG-75
3 1/4"	82	3 1/4"	16.00	72.50	74.00	92.00	CSCG-82
3 1/2"	88	3 1/2"	17.00	80.50	83.00	102.00	CSCG-88
4"	100	4"	18.00	84.00	95.00	110.00	CSCG-100

Dimensions are in mm